

Stepper Motors

0,65 mNm

Two phase, 20 steps per revolution
PRECiStep® Technology

AM0820-ww-ee

ww =		A-0,225-7		V-3-18		V-5-56		Drive mode	
		Current	Voltage	Current	Voltage	Current	Voltage		
1	Nominal current per phase (both phases ON) ¹⁾	0,225	–	0,15	–	0,08	–	A	
2	Nominal voltage per phase (both phases ON) ¹⁾	–	2	–	3	–	5	V DC	
3	Phase resistance (at 20°C)	7,3		18		56		Ω	
4	Phase inductance (1kHz)	1,4		3,9		12,6		mH	
5	Back-EMF amplitude	0,8		1,3		2,4		V/k step/s	
6	Holding torque (at nominal current in both phases)	0,65							mNm
7	Holding torque (at twice the nominal current)	1							mNm
8	Step angle (full step)	18							degree
9	Angular accuracy ¹⁾	± 10							% of full step
10	Residual torque, max.	0,17							mNm
11	Rotor inertia	2,75							·10 ⁻⁹ kgm ²
12	Resonance frequency (at no load)	170							Hz
13	Electrical time constant	0,21							ms
14	Ambient temperature range	–30 ... +70							°C
15	Winding temperature tolerated, max.	130							°C
16	Thermal resistance winding-ambient air	76							°C/W
17	Thermal time constant	180							s
18	Shaft bearings	sintered bronze sleeves (standard)			ball bearings, preloaded (optional)				
19	Shaft load, max.:								
	– radial (3 mm from bearing)	0,3			3,0				N
	– axial	0,2			1,5				N
20	Shaft play, max.:								
	– radial (0,2N)	15			12				µm
	– axial (0,2N)	140			–0				µm
21	Isolation test voltage	200							V DC
22	Weight	3,3							g

¹⁾ Relevant for 2 phases ON only. On PWM drivers with chopper (current mode), the current is set to the nominal value and the supply voltage is typically 3 to 5x higher than the nominal voltage.

²⁾ Curves measured with a load inertia of 6 · 10⁻⁹ kgm², in half-step mode for the “1 x nominal voltage” curve, in 1/4 micro-stepping mode for the other curves.



Driver settings ^{1) 2)}

5x nominal voltage *


2.5x nominal voltage *

1 x nominal voltage

* Current limited to its nominal value

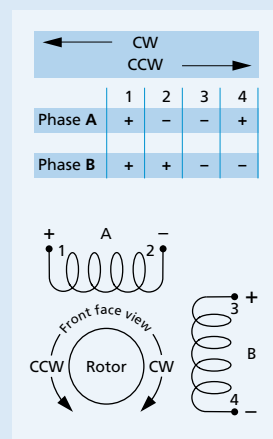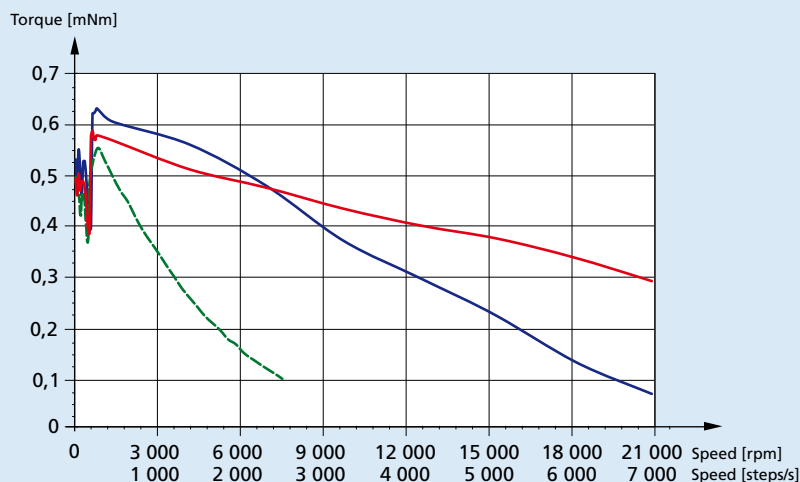

Dimensional drawing

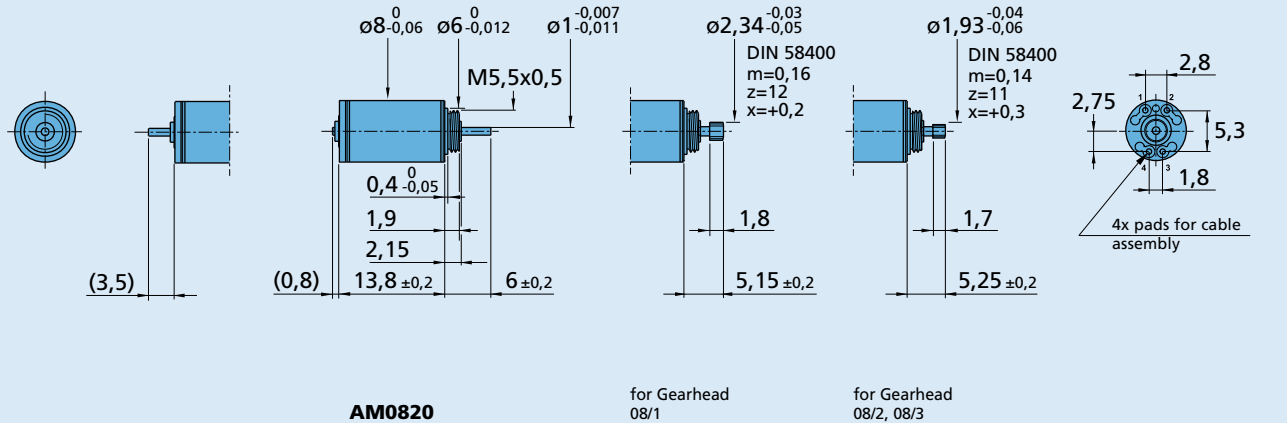

Combinations

Drive Electronics	Encoders	Cables	Gearheads / Lead screws
Available on request	Available on request	List available on request	08/1 08/2 08/3* 10/1 Lead screws M1,2 - M1,6 Lead screws M2 - M2,5 - M3

* Zero Backlash Gearheads

Ordering information

Example: **AM0820-2R-V-3-18-08**

Motor type	Bearings (rr)	Winding (wv)	Motor execution (ee)		
AM = Motor design 08 = Motor diameter (mm) 20 = Steps per revolution	Special lubricant options available		Only front output shaft	With double output shaft	Front output shaft
AM0820	- (sleeve bearings) -2R (2 ball bearings)	-V-3-18 -V-5-56 -A-0,225-7	-01 -08 -10 -12 -21 -23 -25	-00 -09 -11 -13 -20 -22 -24	Plain shaft Pinion 08/1 Pinion 10/1 Pinion 08/2, 08/3 Shaft for lead screw M1,2 Shaft for lead screw M2 - M2,5 - M3 Shaft for lead screw M1,6